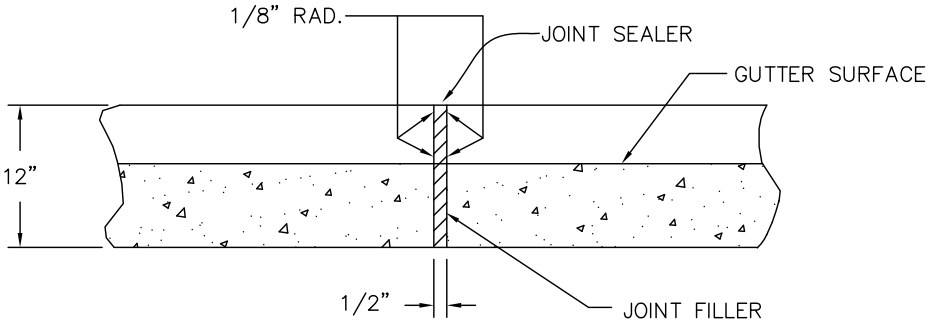

TRANSVERSE EXPANSION JOINT IN CURB AND GUTTER

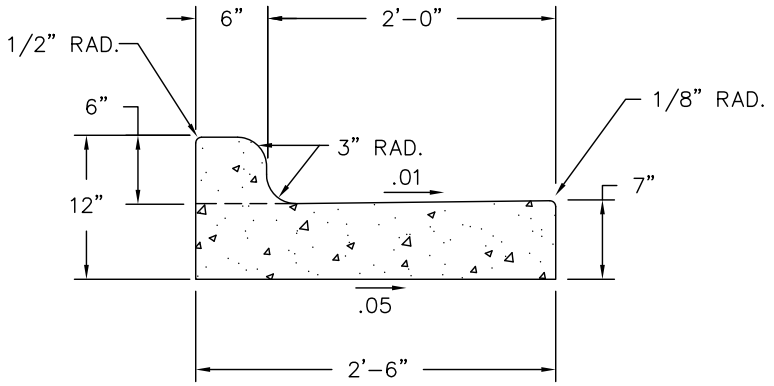

2'-6" SPILL CURB AND GUTTER

SPILL GUTTER MAY BE USED ONLY WHEN DIRECTED ON THE PLANS OR AS APPROVED BY THE DIRECTOR.

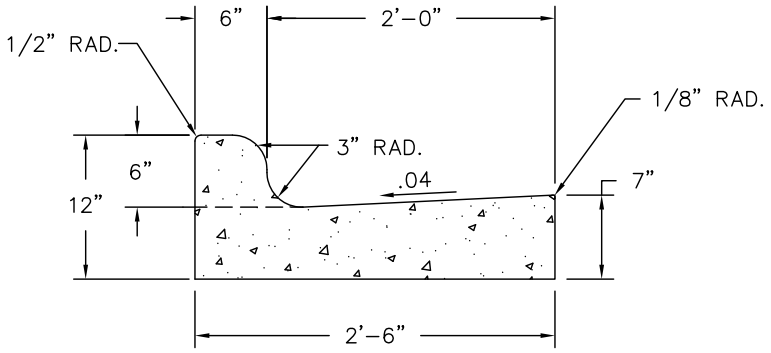

2'-6" CURB AND GUTTER

NOTES:

A. PLACE CONTRACTION JOINTS AT 10' INTERVALS, EXCEPT THAT A 15' SPACING MAY BE USED WHEN A MACHINE IS USED OR WHEN SATISFACTORY SUPPORT FOR THE FACE FORM CAN BE OBTAINED WITHOUT THE USE OF TEMPLATES AT 10' INTERVALS.

B. JOINT SPACING MAY BE ALTERED IF REQUIRED BY THE ENGINEER.

C. CONTRACTION JOINTS MAY BE INSTALLED WITH THE USE OF TEMPLATES OR FORMED BY OTHER APPROVED METHODS. CONSTRUCT NON-TEMPLATE FORMED JOINTS A MIN. OF 1 ½" DEEP.

D. FILL ALL CONSTRUCTION JOINTS WITH JOINT FILLER AND SEALER.

E. SPACE EXPANSION JOINTS AT 90' INTERVALS AND ADJACENT TO ALL RIGID OBJECTS.

F. CONSTRUCT THE CONCRETE IN ACCORDANCE WITH SECTION 825 AND SECTION 846 OF THE MOST RECENT EDITION OF THE NCDOT STANDARD SPECIFICATIONS FOR ROADS & STRUCTURES.

CITY OF HIGH POINT NORTH CAROLINA ENGINEERING SERVICES DEPARTMENT APPROVED APRIL 12, 2007 BKPL DIRECTOR	ISSUED 4-12-07 REVISIONS	STANDARD DRAWING FOR 2'-6" CURB AND GUTTER
		C-G_30.DWG 502.00 SHEET 1 OF 1