


PLAN VIEW

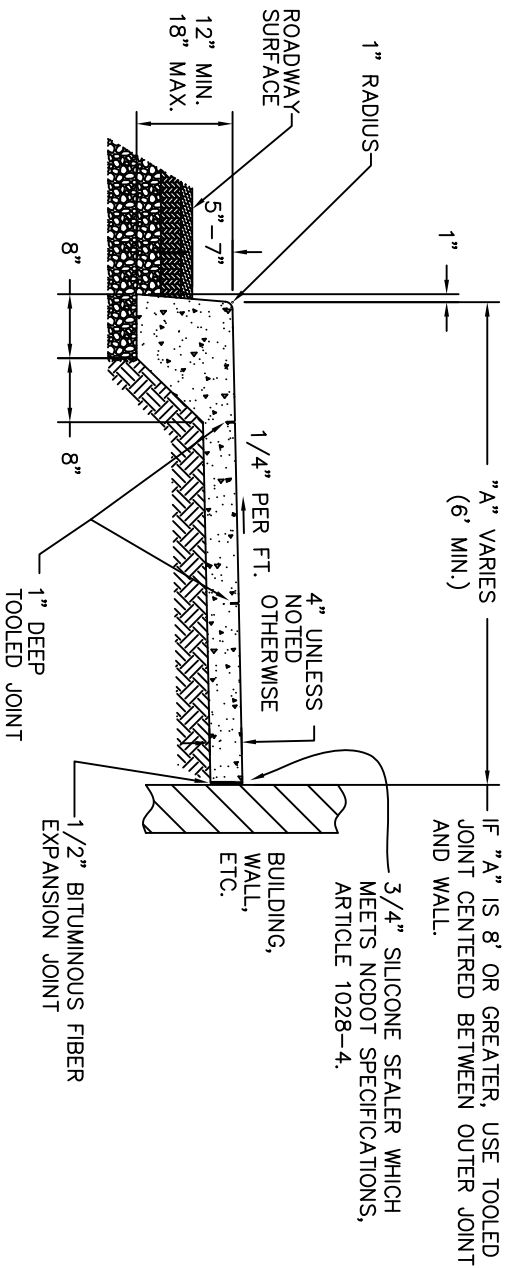

CROSS SECTION

- NOTES:
- A. EXISTING GRANITE OR CONCRETE CURB IS TO BE REMOVED.
 - B. ALL CONCRETE SHALL BE PCC, CLASS A, 3,000 PSI AND SHALL BE CONSTRUCTED IN ACCORDANCE WITH SECTION 825 AND SECTION 848 OF THE CURRENT EDITION OF THE NCDOT STANDARD SPECIFICATIONS FOR ROADS & STRUCTURES.
 - C. SEE CITY STD. NO. 511 FOR WHEELCHAIR RAMP LOCATION REQUIREMENTS AND CONSTRUCTION GUIDELINES.
 - D. PRIOR TO THE POURING OF THE CONCRETE, THE FOUNDATION, FORMWORK, ETC MUST BE APPROVED BY THE ENGINEERING SERVICES DEPT. AND/OR THE PUBLIC SERVICES DEPT.
 - E. ANY VERTICAL OBSTRUCTIONS (FIRE HYDRANTS, POLES, ETC.) MUST BE RELOCATED TO PROVIDE A MINIMUM CLEAR WIDTH OF 5'.
 - F. SIDEWALK ALWAYS 6" THICK IN CENTRAL BUSINESS DISTRICT (CBD).

CITY OF HIGH POINT
NORTH CAROLINA
ENGINEERING SERVICES DEPARTMENT

APPROVED: APRIL 12, 2007
BSP
DIRECTOR

ISSUED 4-12-07	
REVISIONS	
7-16-13	

STANDARD DRAWING FOR
MONOLITHIC CONCRETE SIDEWALK AND CURB

MONO_SW.DWG
512.00
SHEET 1 OF 1