



THE COVER SHALL READ "STORM WATER."

TOP OF COVER
BOTTOM OF COVER

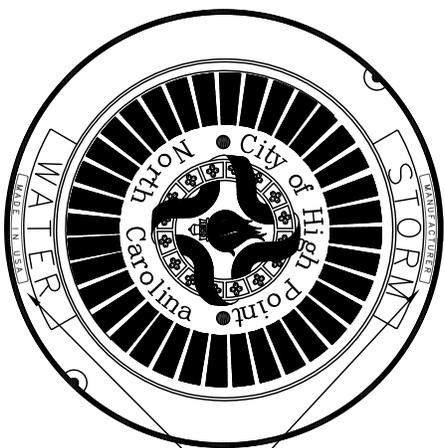


TOP OF COVER SHALL ALSO DISPLAY MANUFACTURERS NAME AND FOUNDRY LOCATION

COVER TOP AND BOTTOM DETAIL

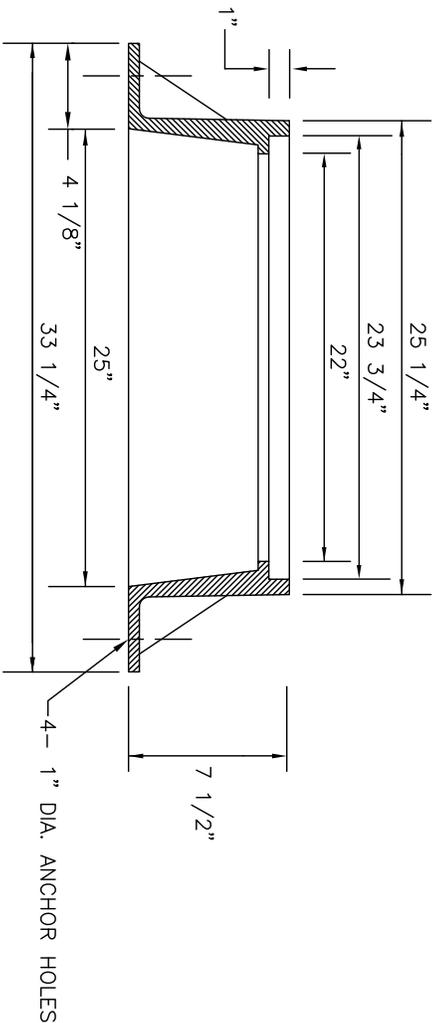

CROSS SECTION RING DETAIL

CROSS SECTION COVER DETAIL

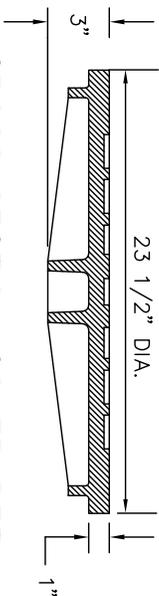

COVER FACE

- NOTES:
- A. MINIMUM AVERAGE WEIGHT:
COVER 125 LBS.
FRAME 190 LBS.
UNIT 315 LBS.
 - B. MANHOLE RING AND COVERS SHALL BE MADE OF GRAY CAST IRON AND SHALL CONFORM TO AASHTO M105 AND ASTM A48, CLASS 35B.
 - C. RING & COVER SHALL HAVE MACHINED SEATS.
 - D. APPROVED RING & COVERS
 - 1. US FOUNDRY & MFG. CORP. RING USF 669, COVER TYPE-KY.
 - 2. EAST JORDAN IRON WORKS RING V-1384-1, COVER V-1384.
 - 3. APPROVED EQUAL.

CITY OF HIGH POINT
NORTH CAROLINA

ENGINEERING SERVICES DEPARTMENT

APPROVED: MARCH 1, 2007

.....
DIRECTOR

ISSUED 03-01-07
REVISIONS

REVISIONS

STANDARD DRAWING FOR

STORM MANHOLE RING AND COVER

FOR ROADWAY APPLICATIONS

RC_ST_SEAL.DWG

412.00

SHEET 1 OF 1