


INDUSTRIAL & COLLECTOR STREET

41' B-B
 40' F-F
 36' E-E
PAVEMENT DESIGN
 10" ABC
 2 1/4" BCBC TYPE 119.0B
 1" BCSC TYPE SF9.5A

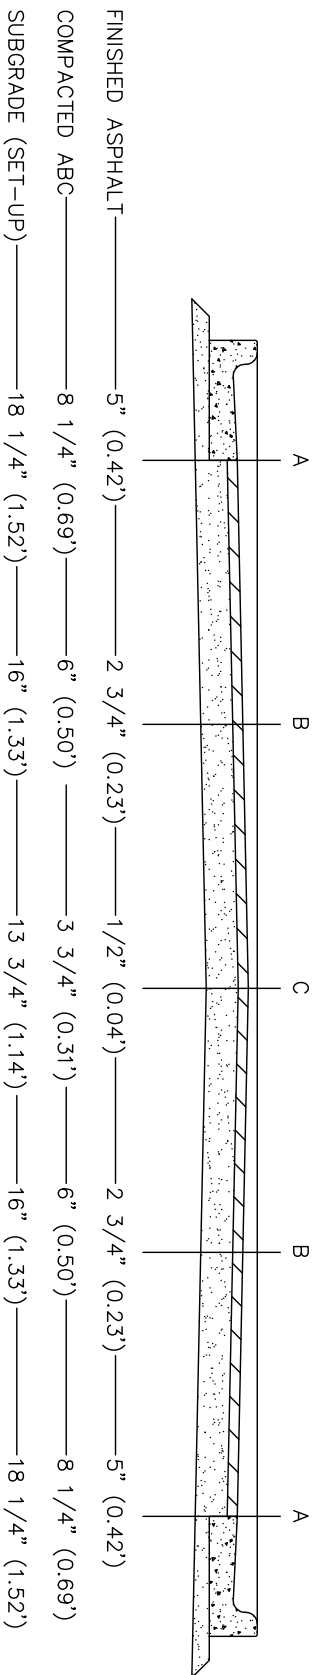

- A. AT EDGE OF PAVEMENT
- B. 9' FROM EDGE OF PAVEMENT
- C. 18' (PEAK OF CROWN)

THE PURPOSE OF THIS DRAWING IS TO PROVIDE THE PROJECT SUPERINTENDENT/INSPECTOR WITH A QUICK AND EASY METHOD OF CHECKING VARIOUS CRITICAL MEASUREMENTS USING A STRINGLINE PULLED TIGHTLY FROM BACK OF CURB TO BACK OF CURB. MEASUREMENTS ARE BASED ON A NORMAL CROWN OF 1/4" PER FOOT.

- NOTES:**
1. THIS DRAWING IS ONLY APPLICABLE FOR A NORMAL CROWN ROAD WITH 1/4" /FT SLOPE. THIS IS NOT APPLICABLE IN SUPERELEVATION & SUPERELEVATION TRANSITION AREAS.
 2. ALL MANHOLES AND WATER VALVES ARE ALSO TO BE CHECKED FROM BACK OF CURB AND GUTTER.

CITY OF HIGH POINT NORTH CAROLINA ENGINEERING SERVICES DEPARTMENT APPROVED <i>MAX</i> MAY 3, 2007 DIRECTOR	ISSUED 5-3-07 REVISIONS	STANDARD DRAWING FOR 40' F-F INDUSTRIAL OR COLLECTOR STREET STRINGLINE REFERENCE	STRING_40F-F.DWG 527.00 SHEET 1 OF 1
--	----------------------------	---	---