


4-LANE THOROUGHFARE

53' B-B
52' F-F
48' E-E

PAVEMENT DESIGN

10" ABC OR 6" B25.0C
4" I19.0C
2" S9.5C

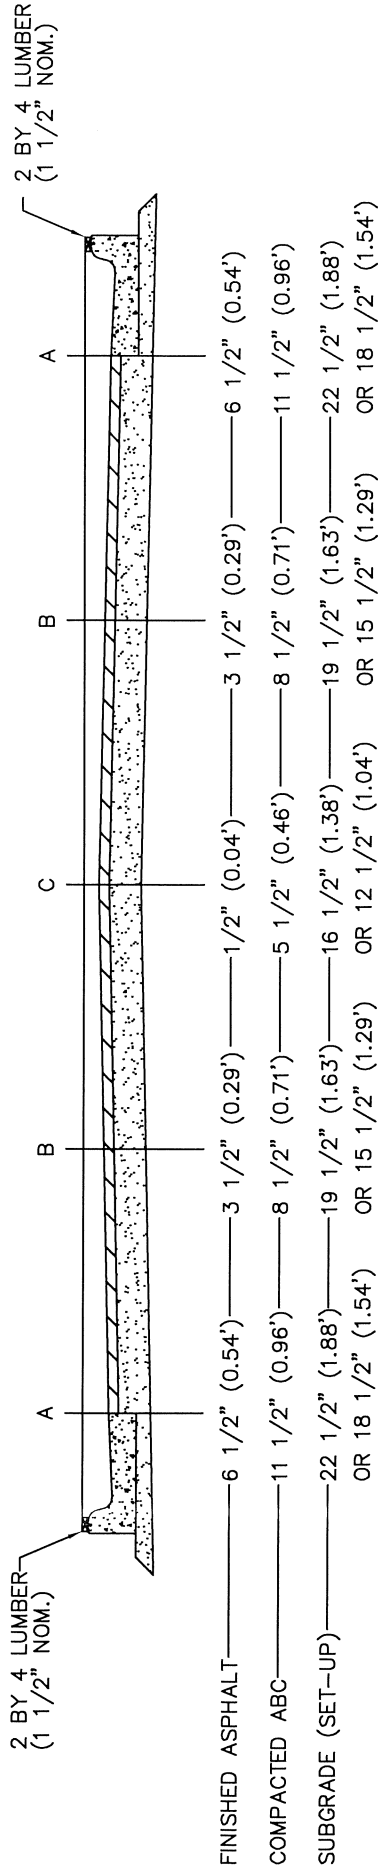

- A. AT EDGE OF PAVEMENT
- B. 12' FROM EDGE OF PAVEMENT
- C. 24' (PEAK OF CROWN)

THE PURPOSE OF THIS DRAWING IS TO PROVIDE THE PROJECT SUPERINTENDENT/INSPECTOR WITH A QUICK AND EASY METHOD OF CHECKING VARIOUS CRITICAL MEASUREMENTS USING A STRINGLINE PULLED TIGHTLY FROM BACK OF CURB TO BACK OF CURB. MEASUREMENTS ARE BASED ON A NORMAL CROWN OF 1/4" PER FOOT.

NOTES:

1. THIS DRAWING IS ONLY APPLICABLE FOR A NORMAL CROWN ROAD WITH 1/4"/FT SLOPE. THIS IS NOT APPLICABLE IN SUPERELEVATION & SUPERELEVATION TRANSITION AREAS.
2. ALL MANHOLES AND WATER VALVES ARE ALSO TO BE CHECKED FROM BACK OF CURB AND GUTTER.

CITY OF HIGH POINT
NORTH CAROLINA
ENGINEERING SERVICES DEPARTMENT

APPROVED: JUL 24, 2023

[Signature]
DIRECTOR

ISSUED 7-24-23

REVISIONS

5-3-07

STRING_52F-F.DWG

STANDARD DRAWING FOR

52' F-F 4-LANE THOROUGHFARE
STRINGLINE REFERENCE

528.00

SHEET 1 OF 1