


# 5-LANE THOROUGHFARE

65' B-B  
64' F-F  
60' E-E

## PAVEMENT DESIGN

10" ABC OR 6" B25.0C  
4" I19.0C  
2" S9.5C

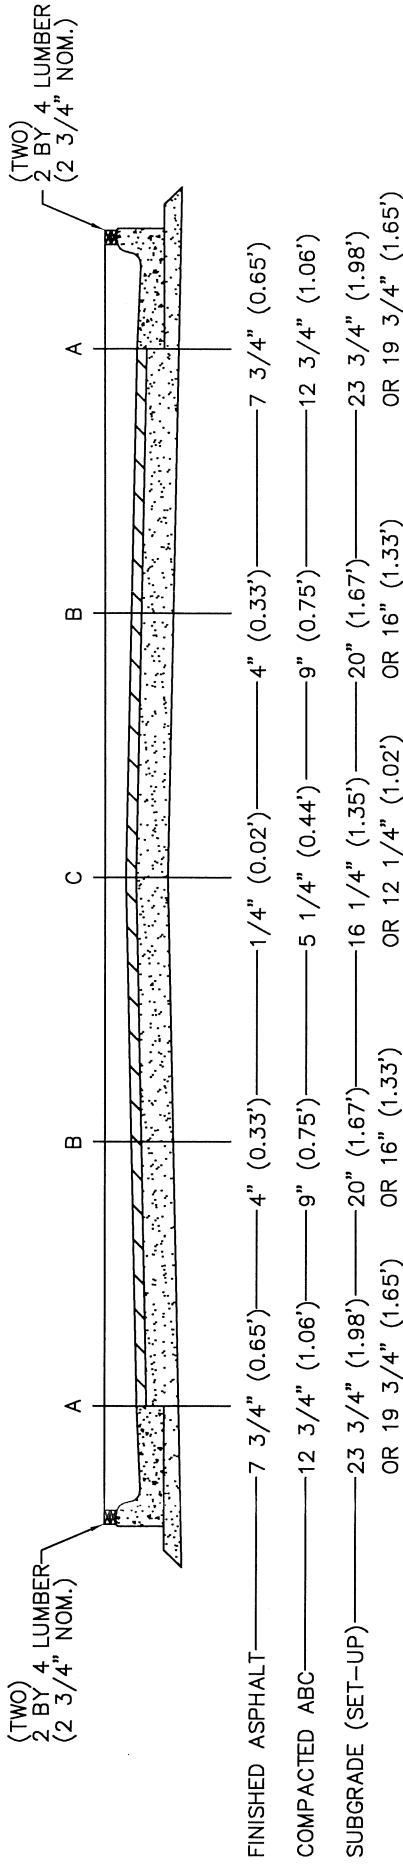

- A. AT EDGE OF PAVEMENT
- B. 15' FROM EDGE OF PAVEMENT
- C. 30' (PEAK OF CROWN)

THE PURPOSE OF THIS DRAWING IS TO PROVIDE THE PROJECT SUPERINTENDENT/INSPECTOR WITH A QUICK AND EASY METHOD OF CHECKING VARIOUS CRITICAL MEASUREMENTS USING A STRINGLINE PULLED TIGHTLY FROM BACK OF CURB TO BACK OF CURB. MEASUREMENTS ARE BASED ON A NORMAL CROWN OF 1/4" PER FOOT.

**NOTES:**

1. THIS DRAWING IS ONLY APPLICABLE FOR A NORMAL CROWN ROAD WITH 1/4"/FT SLOPE. THIS IS NOT APPLICABLE IN SUPERELEVATION & SUPERELEVATION TRANSITION AREAS.
2. ALL MANHOLES AND WATER VALVES ARE ALSO TO BE CHECKED FROM BACK OF CURB AND GUTTER.

STRING_64F-F.DWG
529.00
SHEET 1 OF 1

### STANDARD DRAWING FOR 64' F-F 5-LANE THOROUGHFARE STRINGLINE REFERENCE

ISSUED 7-24-23
REVISIONS
5-3-07

CITY OF HIGH POINT  
NORTH CAROLINA  
ENGINEERING SERVICES DEPARTMENT  
APPROVED: JUL 24, 2023  
*[Signature]*  
DIRECTOR