


PLAN

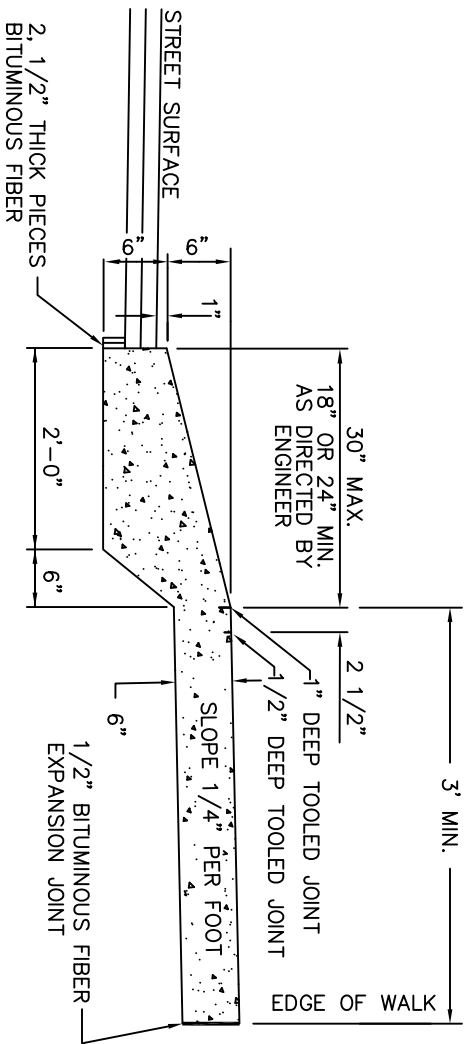

SECTION A-A

- NOTES:
1. THIS SECTION IS TO BE USED IN AREAS OF VERTICAL CURB WITH NO GUTTER, NO PLANTING STRIP, AND HOMOGENEOUS CURB AND SIDEWALK. GENERALLY, THIS IS IN UPTOWN AREAS.
 2. RAMP TO BEGIN 1" ABOVE STREET SURFACE.
 3. ALL CONCRETE TO BE MIN. 3,000 PSI OR AS DIRECTED.
 4. REFER TO THE CITY OF HIGH POINT DRIVEWAY ORDINANCE FOR DRIVEWAY REGULATIONS.

CITY OF HIGH POINT
 NORTH CAROLINA
 ENGINEERING SERVICES DEPARTMENT
 APPROVED: APRIL 12, 2007
 BSK
 DIRECTOR

ISSUED	4-12-07
REVISIONS	
9-15-10	
7-16-13	

STANDARD DRAWING FOR
UPTOWN SIDEWALK AT DRIVEWAY
 FOR MONOLITHIC CONC. SIDEWALK AND CURB STREETS

MONO_DW.DWG
513.00
 SHEET 1 OF 1