


GABION FABRIC SPECIFICATIONS	
TREWIRA SPUNBOND TYPE 1120 ENGINEERING FABRIC OR APPROVED EQUAL. (WEAKEST PRINCIPAL DIRECTION)	
MINIMUM REQUIRED ROLL VALUES	
FABRIC PROP.	1120
FABRIC WEIGHT	5.7 OZ./SQ. YD.
THICKNESS	80 MILS
GRAB STRENGTH	80 LBS.
GRAB ELONGATION	65%
TRAP. TEN. STREN.	60 LBS.
PUNCTURE RESIST.	75 LBS.
MULLEN BURST STREN.	285 PSI
AOS	70 SIEVE, 210MM

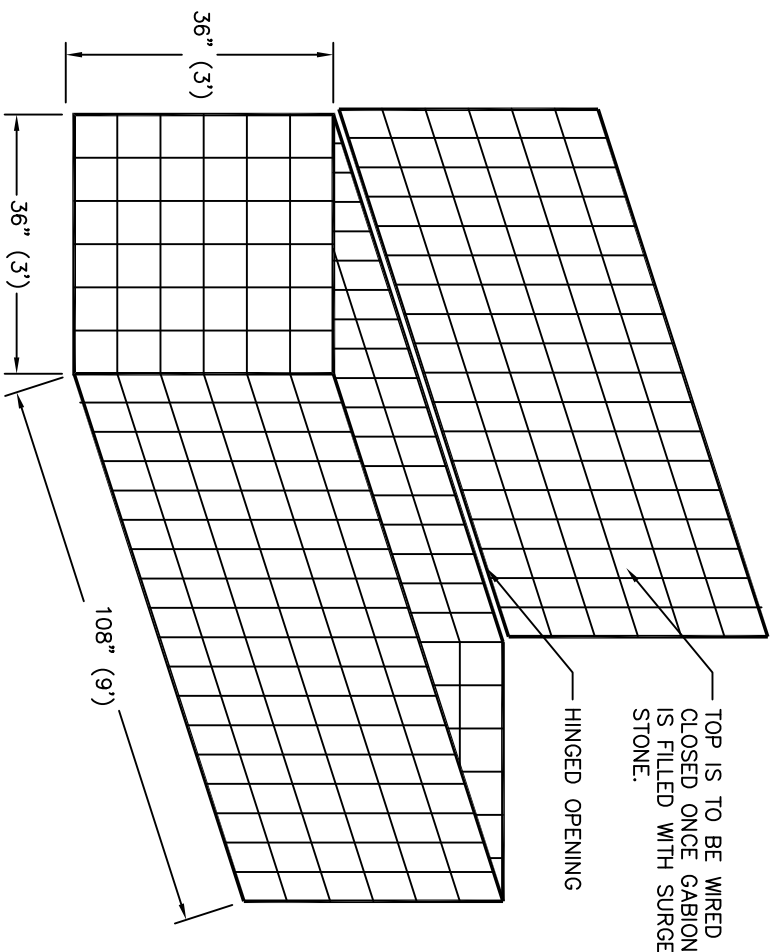

- NOTES:
1. SEE PROJECT SPECIAL PROVISIONS FOR WRITTEN SPECIFICATIONS, IF APPLICABLE.
 2. USE FOUR INCH (4") TO SIX INCH (6") SURGE STONE.
 3. THE FABRIC SHALL BE PLACED ON THE FILL FACE AND ON THE BOTTOM. SEE FABRIC SPECIFICATIONS FOR TYPE.

CITY OF HIGH POINT
 NORTH CAROLINA
 ENGINEERING SERVICES DEPARTMENT

APPROVED: *BSP* FEBRUARY 17, 2009
 DIRECTOR

ISSUED 2-17-09
 REVISIONS

STANDARD DRAWING FOR
3' x 9' GABION
 FOR CITY OF HIGH POINT

3x9_GABION.DWG
614.00
 SHEET 1 OF 1