


PLAN

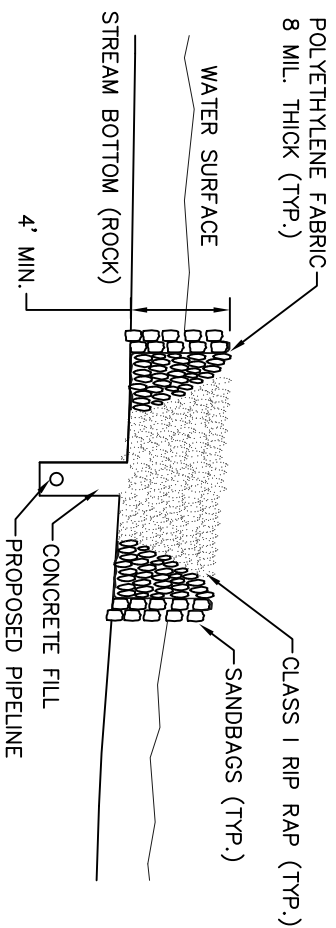

SECTION A-A

- PHASE 1
 - CONSTRUCT COFFER DAM TO CENTERLINE OF STREAM
 - UTILIZE DEWATERING BASIN TO DRAIN WORK AREA
 - INSTALL PROPOSED PIPELINE TO END OF COFFER DAM
 - CARE MUST BE TAKEN TO AVOID CONTAMINATION TO THE STREAM FROM Poured CONCRETE SEALANT
 - REMOVE COFFER DAM
- PHASE 2
 - CONSTRUCT COFFER DAM TO ENCOMPASS END OF PIPELINE
 - UTILIZE DEWATERING BASIN TO DRAIN WORK AREA
 - INSTALL REMAINING PROPOSED PIPELINE
 - CARE MUST BE TAKEN TO AVOID CONTAMINATION TO THE STREAM FROM Poured CONCRETE SEALANT
 - REMOVE COFFER DAM

CITY OF HIGH POINT
 NORTH CAROLINA
 ENGINEERING SERVICES DEPARTMENT

APPROVED: FEBRUARY 17, 2009

BY: [Signature]
 DIRECTOR

ISSUED 2-17-09
 REVISIONS

STANDARD DRAWING FOR

COFFER DAM

FOR 2-PHASE PIPELINE STREAM CROSSINGS

COFFERDAM2.DWG

606.01

SHEET 1 OF 1