


PLYWOOD INLET PROTECTION

- NOTE:
1. ALL PARTIALLY COMPLETED STORM DRAINS SHALL BE PROTECTED AT THE END OF EACH DAY IN ACCORDANCE WITH THESE DETAILS.
 2. ACCUMULATED SEDIMENT SHALL BE REMOVED AND PROPERLY DISPOSED OF AND THE TRENCH BOTTOM REGRADED AND COMPACTED IN ACCORDANCE WITH SPECIFICATIONS PRIOR TO CONTINUANCE OF LAYING PIPE.

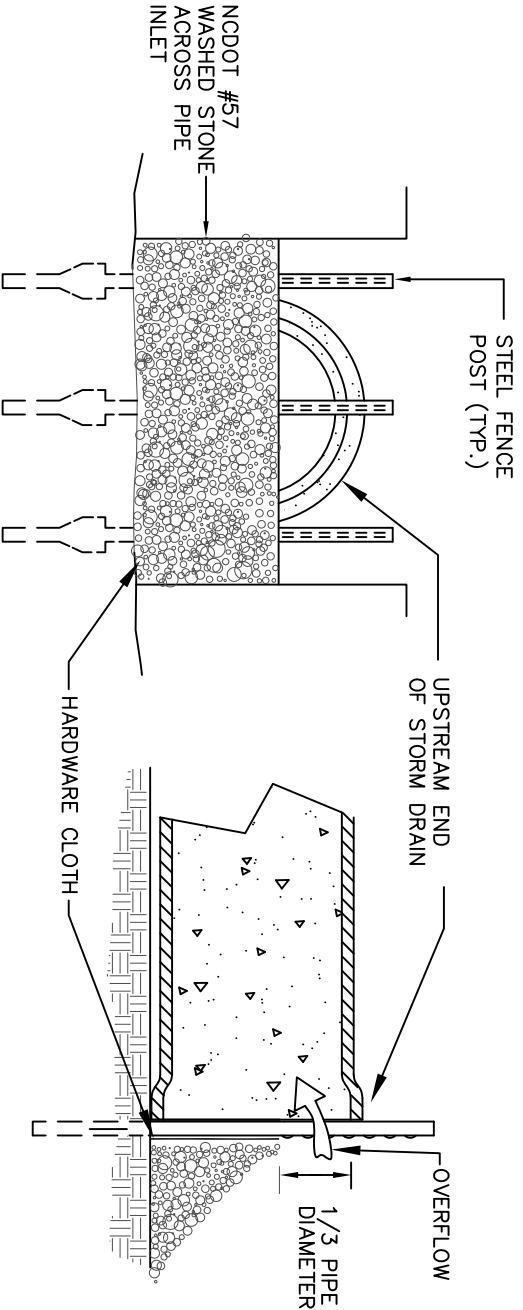

STONE FILTER INLET PROTECTION

CITY OF HIGH POINT
NORTH CAROLINA
ENGINEERING SERVICES DEPARTMENT

APPROVED... FEBRUARY 17, 2009
BPK
DIRECTOR

ISSUED 2-17-09
REVISIONS

STANDARD DRAWING FOR
PIPE INLET PROTECTION
FOR EROSION CONTROL

INLPROT.DWG

617.00

SHEET 1 OF 1