


- NOTES:**
1. KEEP STREAM CROSSINGS AT RIGHT ANGLES TO THE STREAM FLOW.
  2. STABILIZE PIPE INLET(S) AND PIPE OUTLET(S) AS NEEDED TO PREVENT SCOURING OF STREAM.

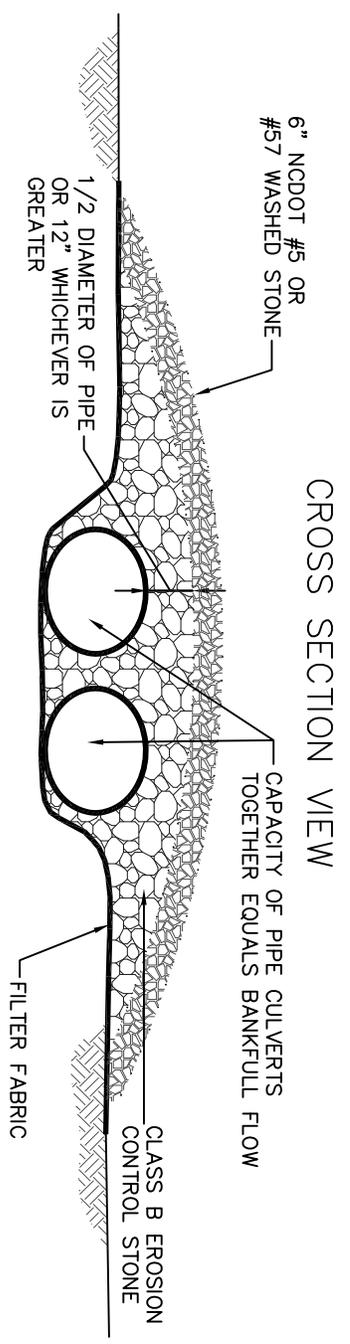

CITY OF HIGH POINT  
 NORTH CAROLINA  
 ENGINEERING SERVICES DEPARTMENT  
 APPROVED... FEBRUARY 17, 2009  
 BSK  
 DIRECTOR

ISSUED 2-17-09

REVISIONS

STANDARD DRAWING FOR  
**TEMPORARY STREAM CROSSING**  
 FOR CULVERTS BACKFILLED WITH STONE

STREAM\_XING2.DWG

605.01

SHEET 1 OF 1