


2'-6" VALLEY CURB AND GUTTER

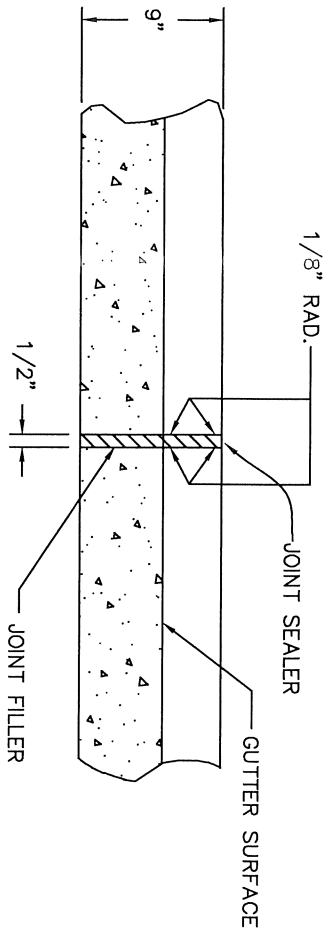

TRANSVERSE EXPANSION JOINT  
IN CURB AND GUTTER

- NOTES:
- PLACE CONTRACTION JOINTS AT 10' INTERVALS, EXCEPT THAT A 15' SPACING MAY BE USED WHEN A MACHINE IS USED OR WHEN SATISFACTORY SUPPORT FOR THE FACE FORM CAN BE OBTAINED WITHOUT THE USE OF TEMPLATES AT 10' INTERVALS.
  - JOINT SPACING MAY BE ALTERED IF REQUIRED BY THE ENGINEER.
  - CONTRACTION JOINTS MAY BE INSTALLED WITH THE USE OF TEMPLATES OR FORMED BY OTHER APPROVED METHODS. CONSTRUCT NON-TEMPLATE FORMED JOINTS A MIN. OF 1 1/2" DEEP.
  - FILL ALL CONSTRUCTION JOINTS WITH JOINT FILLER AND SEALER.
  - SPACE EXPANSION JOINTS AT 90' INTERVALS AND ADJACENT TO ALL RIGID OBJECTS.
  - CONSTRUCT THE CONCRETE IN ACCORDANCE WITH SECTION 825 AND SECTION 846 OF THE MOST RECENT EDITION OF THE NCDOT STANDARD SPECIFICATIONS FOR ROADS & STRUCTURES.

CITY OF HIGH POINT  
NORTH CAROLINA  
ENGINEERING SERVICES DEPARTMENT

APPROVED: September 28, 2022  
*Mary Spaw*  
DIRECTOR

ISSUED 9-28-22
REVISIONS

STANDARD DRAWING FOR  
2'-6" VALLEY CURB AND GUTTER

C-6\_30.DWG

502.01

SHEET 1 OF 1